

VISIO

Herman's



DESIGN
AWARD
2026



Redefining innovation & design
in **professional water dispensing.**

INTRODUCTION

SYSTEM

INSTRUCTIONS

VISIO

Herman's

Dispense filtered ambient, cold, soda and hot water, with **premium filtration level**.



AMBIENT



COLD



SODA



HOT



INTRODUCTION

SYSTEM

INSTRUCTIONS

VISIO

Herman's



Black Matt
RAL 7021



Silver Satin Matt
RAL 9006



White Matt
NCS S 0500-N

CB CE 
CE 1935/2004

INTRODUCTION

SYSTEM

INSTRUCTIONS

VISIO

Herman's



Under-the-counter infrastructure,
saving over the counter space.

| Long-lasting, set temperature and other conditions
for **large number** of servings.

| Optional **ECO mode** setting that allows
to reduce carbon footprint.

| Easy to use & maintain

CB CE 
CE 1935/2004

INTRODUCTION

SYSTEM


INSTRUCTIONS

VISIO

Herman's

SODA / COLD WATER UNIT

TECHNICAL DATA SHEET

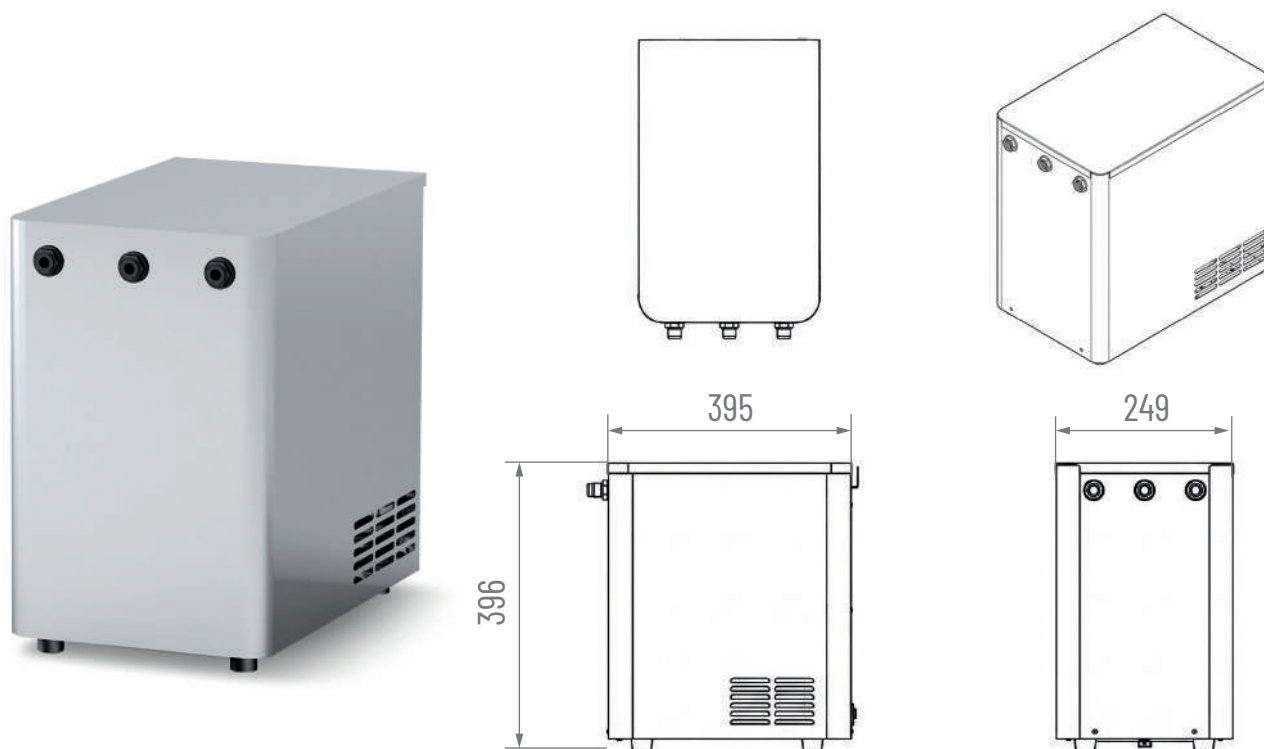

SODA / COLD WATER UNIT SPECIFICATIONS

DIMENSIONS (MM) (D x W x H): 395 x 249 x 396

COOLING POWER OF THE COMPRESSOR (HP): 1/8

COOLING POWER OF THE COMPRESSOR (W): 180

NET WEIGHT (KG): 45

REFRIGERANT TYPE: R290

VOLTAGE (V): 220 - 230V 50Hz

CO2 CONNECTION (FITTINGS): 6mm

OUTPUT (FITTINGS): 8mm

POWER (W): 180

COOLING PERFORMANCE: 42-56 LITER PER HOUR



INTRODUCTION

SYSTEM





INSTRUCTIONS

VISIO

Herman's

HOT WATER TANK

TECHNICAL DATA SHEET

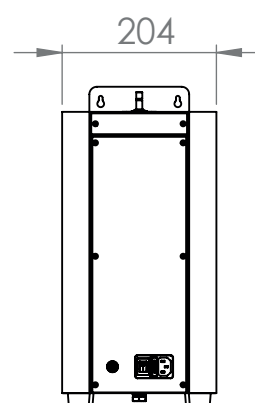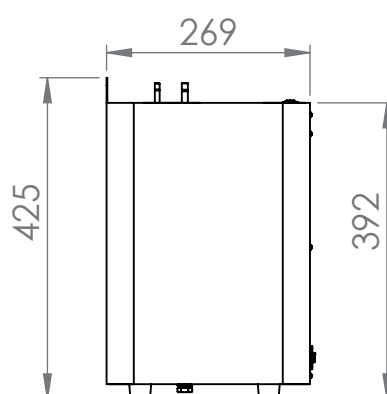

HOT WATER TANK SPECIFICATIONS

NET WEIGHT (KG): 7

DIMENSIONS (MM) (W x D x H): 204 x 269 x 425mm

CAPACITY (L) : 5

HOT WATER COIL (W): 2000

MAX. OPERATING TEMPERATURE (°C): 97

HEATING PERFORMANCE (liter per hour): 30

CB CE 
CE 1935/2004



INTRODUCTION

SYSTEM

INSTRUCTIONS


VISIO SYSTEM

Herman's

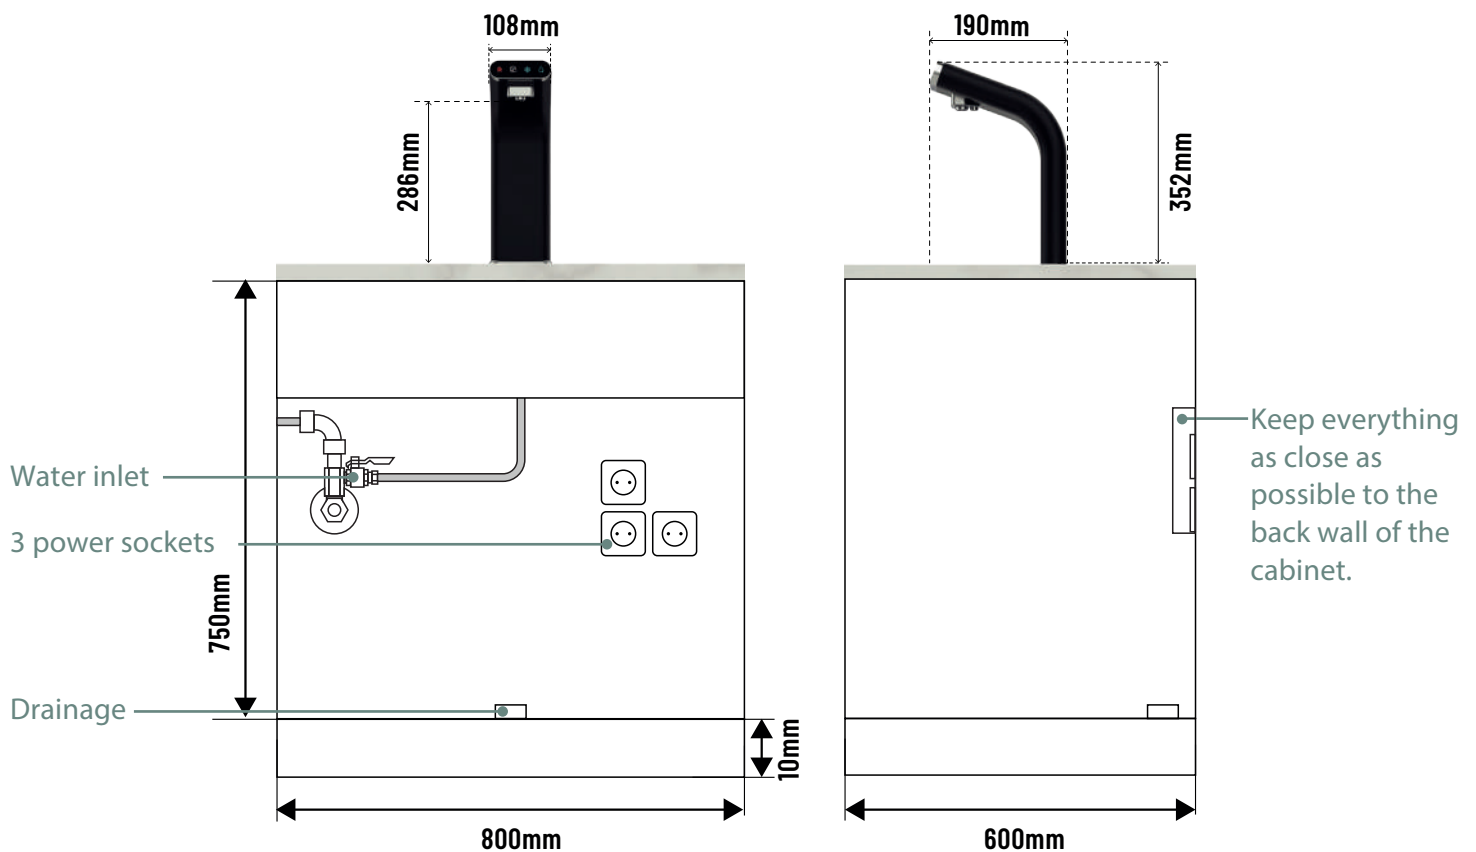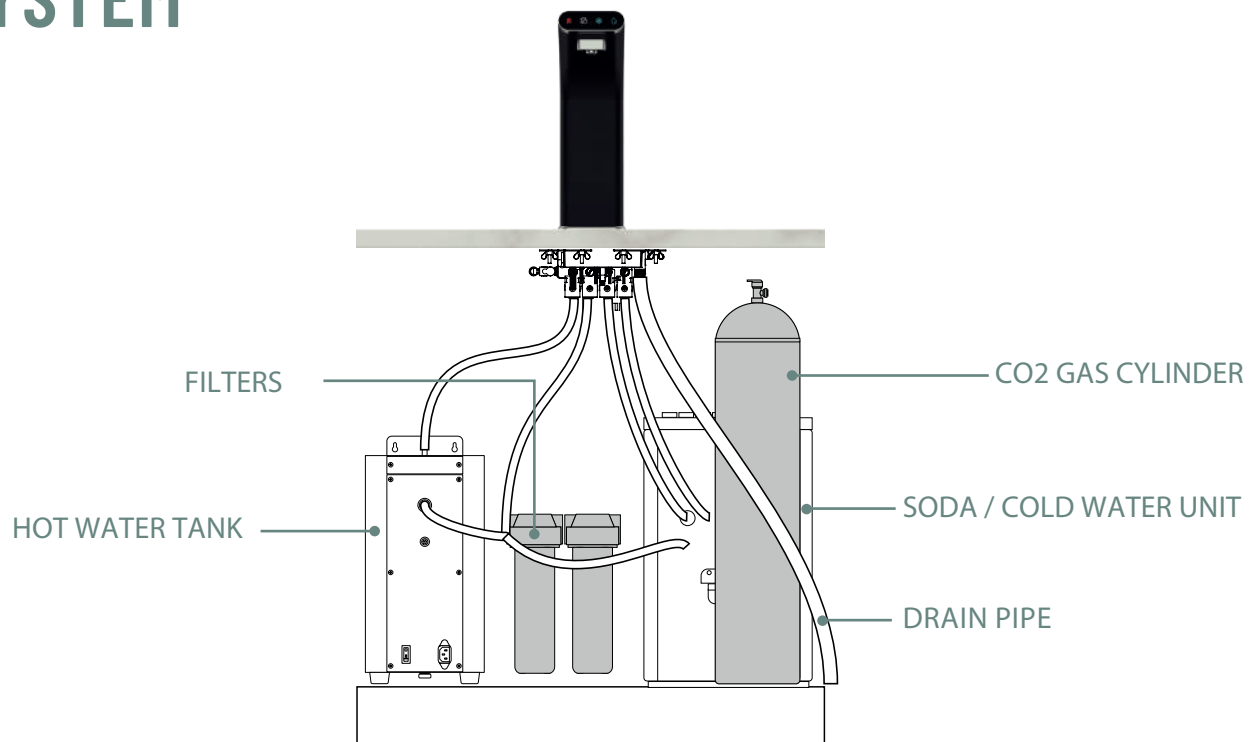


Cold Water Pouring

Push  and hold

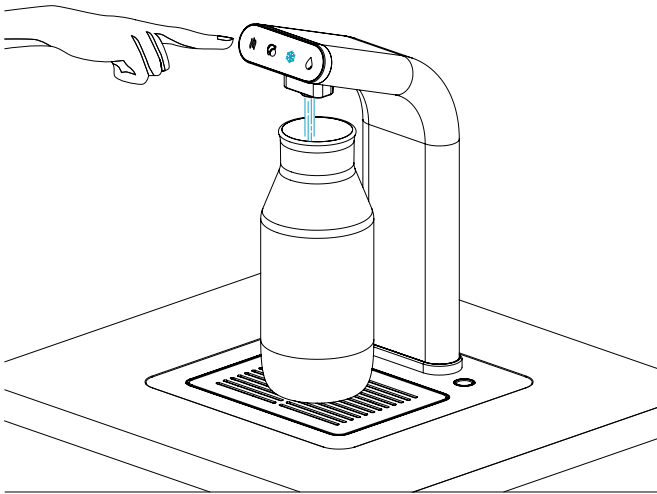


Sparkling Water Pour

Push  and hold

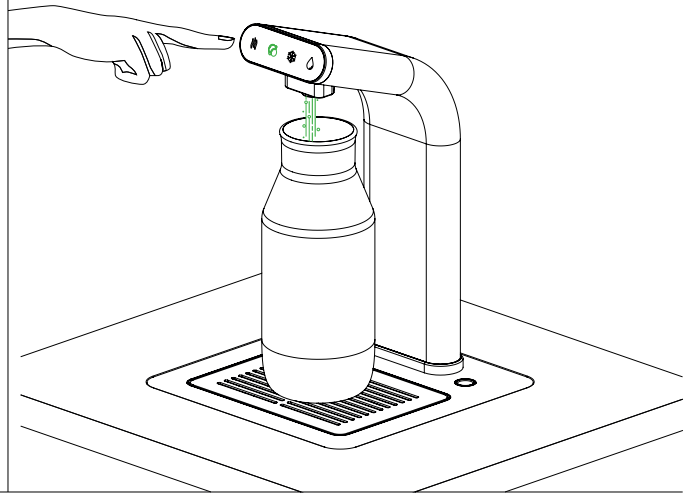


Hot Water Pouring (With child safety)

Push  and hold

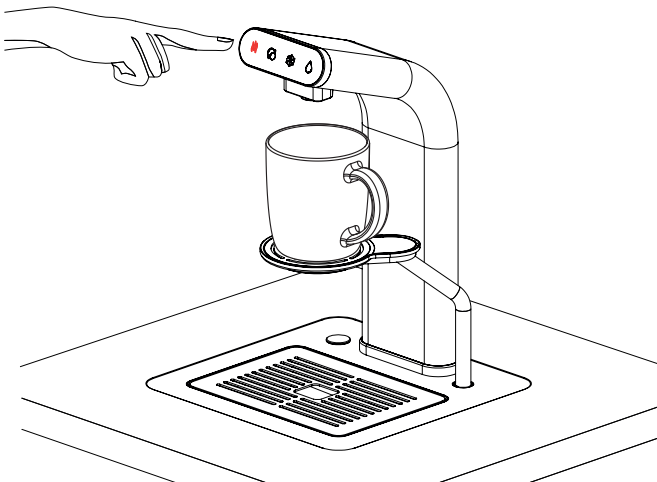


Push  and release

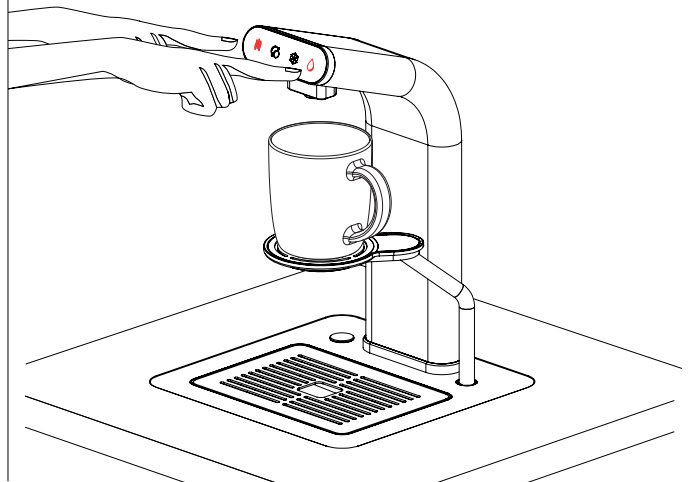



Hot Water Pouring (Without child safety)

Push  and hold

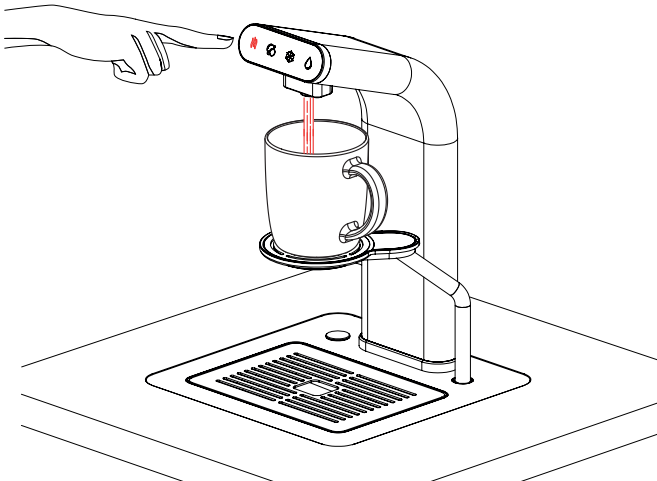


Release

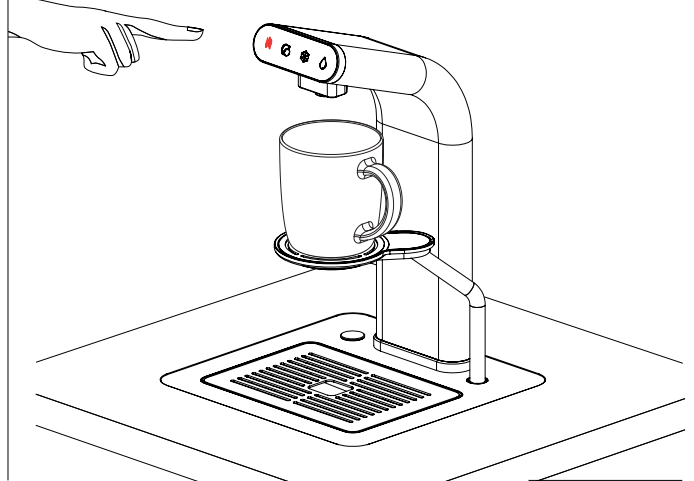


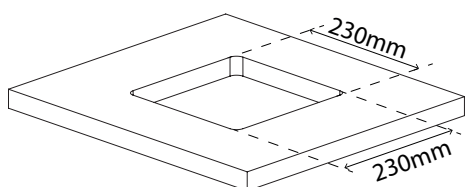


- Cut a 230×230 mm opening in the counter
- * The product must be placed at least 10 cm away from any wall or obstruction

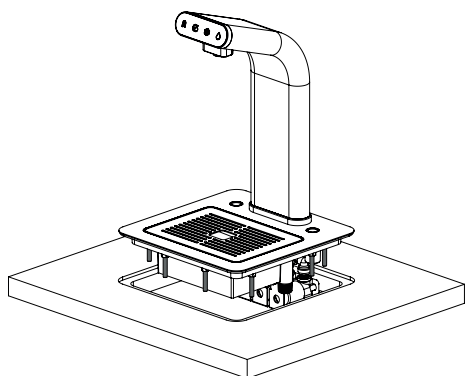


- Install the VISIO faucet into the pre-cut hole in the counter

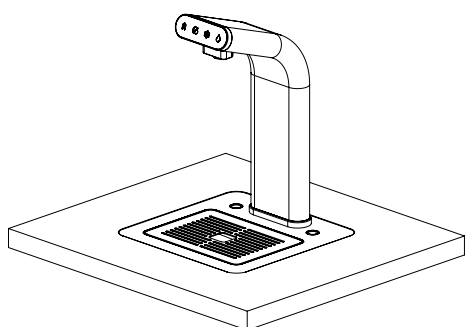

- Make sure it's aligned


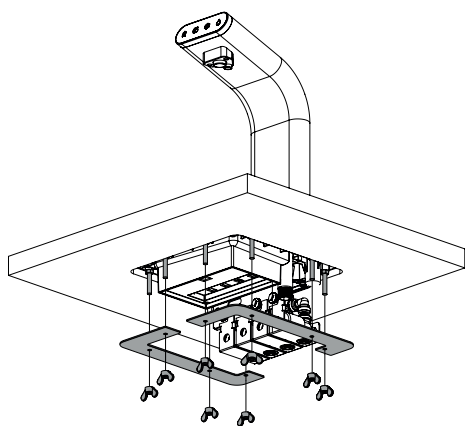


- Under the counter: Secure the faucet with the 2 plates and the 8 wing nuts

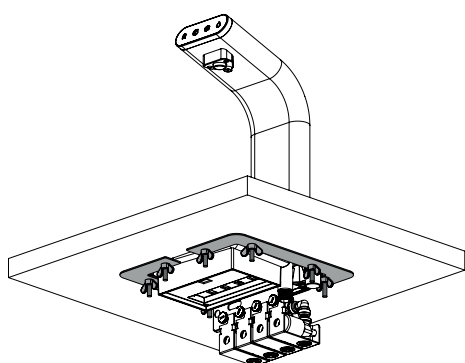



- Ensure all wing nuts are securely tightened



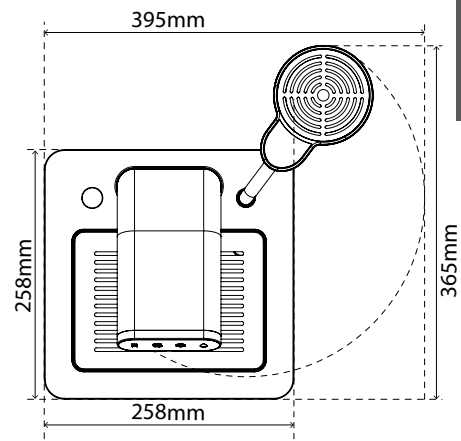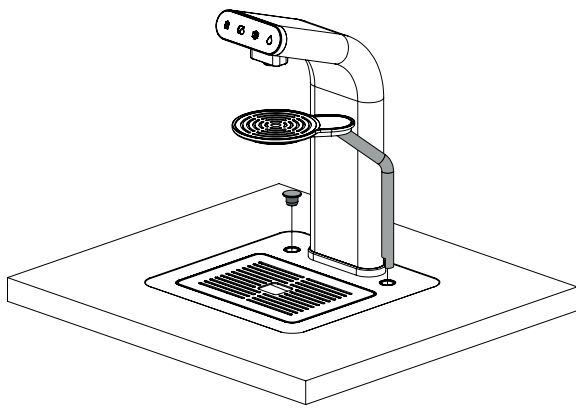

Herman's

Position the tray on your preferred side (left or right) and attach the tray cap accordingly

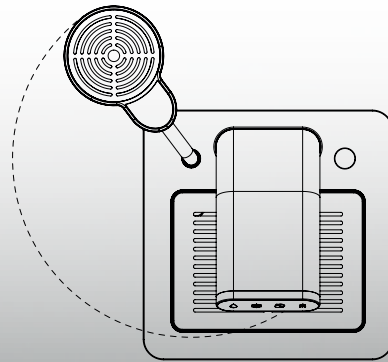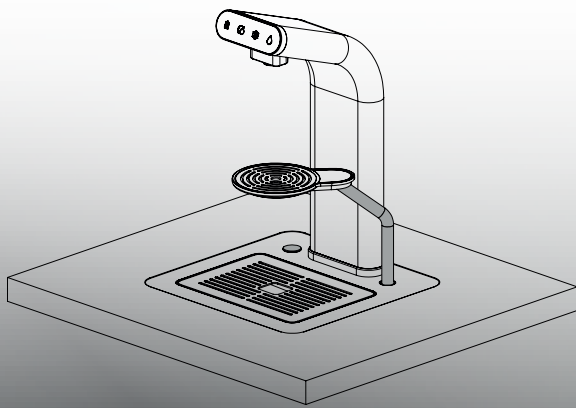

INTRODUCTION

SYSTEM

INSTRUCTIONS

VISIO

Herman's



VISIO

Herman's



DESIGN
AWARD
2026



*** Color customization available for MOQ of 25 pcs