

VISIO Installation Requirements

Under-the-counter system. Only the faucet sits on the counter; the filtration, soda/cold unit, hot water tank and CO2 cylinder install in the cabinet below.

COUNTER & FAUCET

Counter opening (cut-out)	230 × 230 mm
Faucet counter footprint	258 × 395 mm
Faucet height above counter	365 mm
Faucet body (W x D)	108 × 190 mm
Spout height	352 mm
Wall / obstruction clearance	≥10 cm

CABINET

Cabinet (W x D x H)	800 × 600 × 750 mm
Hot water tank (W x D x H)	204 × 269 × 425 mm
Hot water tank net weight	7 kg
Soda / cold unit (D x W x H)	395 × 249 × 396 mm
Soda / cold unit net weight	45 kg
CO2 connection / output fittings	6 mm / 8 mm

UTILITIES

Power

3 power sockets required inside the cabinet. Hot water tank coil power: 2,000 W.


Water Inlet

Mains water inlet required inside the cabinet, feeding the multi-stage filtration system.

Drainage

Drainage connection required. Drip tray drains to standard plumbing, keeping the counter dry and hygienic.

UNDER-COUNTER SYSTEM

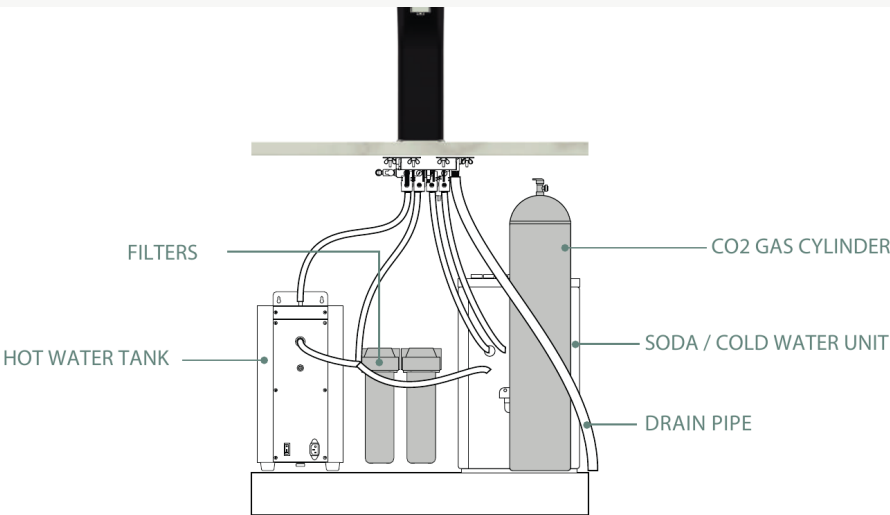


One cabinet, 800 mm wide x 600 mm deep x 750 mm high. Keep everything as close as possible to the back wall of the cabinet.


Before installation: confirm the cabinet interior accommodates the hot water tank (204 × 269 × 425 mm), the soda/cold unit (395 × 249 × 396 mm, 45 kg), the filtration stages and the CO2 cylinder, with all three power sockets, the water inlet and the drain accessible. The counter cut-out reference on page 3 is not to scale; mark the 230 × 230 mm opening directly on the counter with measuring tools.

Faucet Installation, Step by Step


Five steps from cut-out to secured faucet. The product must be placed at least 10 cm away from any wall or obstruction.

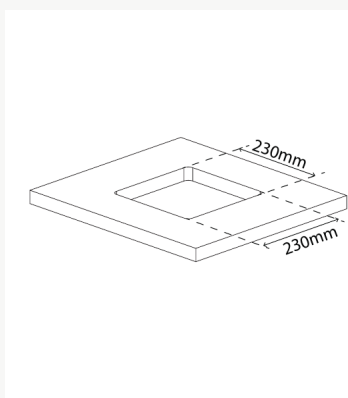


- 1** Cut a 230 × 230 mm opening in the counter.

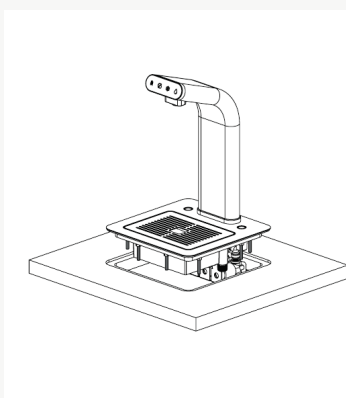


- 2** Install the VISIO faucet into the pre-cut hole in the counter.

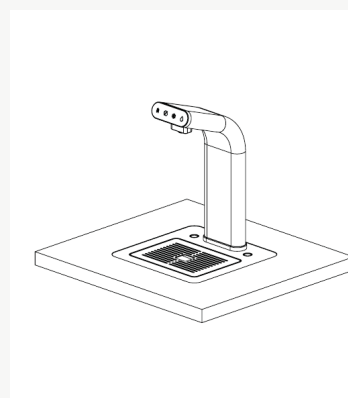

- 3** Make sure it's aligned.

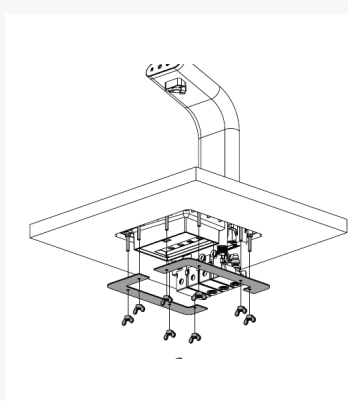


- 4** Under the counter: secure the faucet with the 2 plates and the 8 wing nuts.

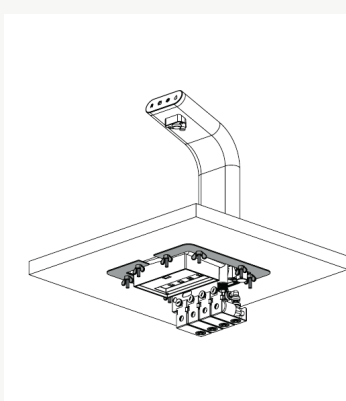

- 5** Ensure all wing nuts are securely tightened.

Cup tray: position the tray on your preferred side, left or right, and attach the tray cap accordingly.

NOT TO SCALE. DO NOT CUT ALONG THIS DRAWING

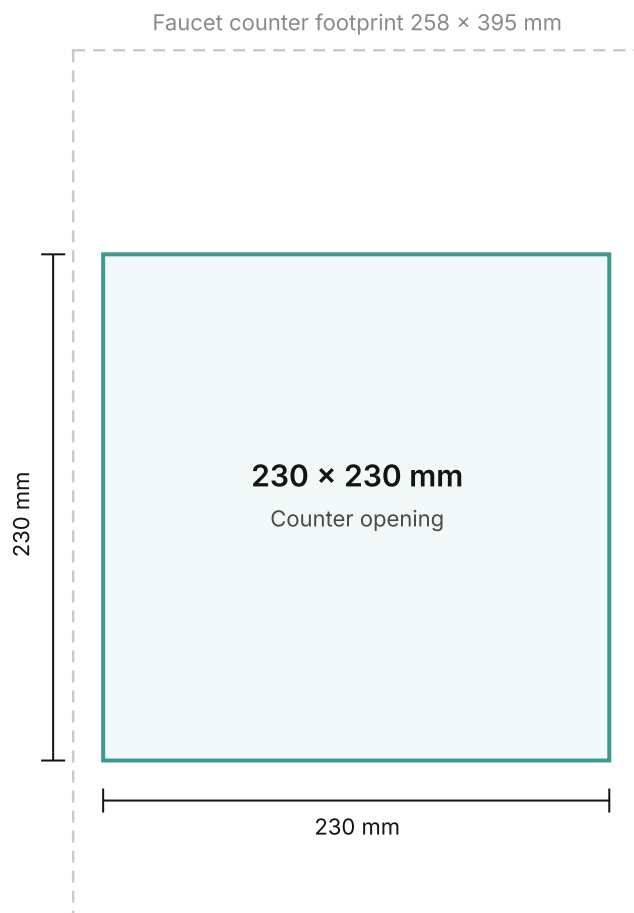

A 230 × 230 mm square is wider than a printable A4 sheet, so this drawing cannot be printed at true scale. **Measure and mark the 230 × 230 mm opening directly on the counter.** Keep the product at least 10 cm away from any wall or obstruction and confirm the full 258 × 395 mm faucet footprint sits flat on the finished counter.